

# ARWF | PULSAIR™

## WALL FAN HEATER



### THE CLASSIC FAN HEATER

You won't find anything better than this efficient, durable and low noise fan heater. The Pulsair is extremely popular for many reasons. First, it can be recessed or surface mounted with a surface adapter (optional). It can also be mounted vertically or horizontally so that air can flow either up and down or right and left. Finally, the slim-line Pulsair can be recessed into a wall thickness of 2 in. to 3 in. While it's a winning heating solution for hallways or bathrooms, it can also be installed anywhere in the house, such as the office, or in commercial spaces. Its nichrome element provides instant heat. Available from 500 W to 2000 W, and from 120 V to 277 V, the Pulsair is recognized and recommended by those in the know.

#### VERY QUIET FAN HEATER

#### THE MOST RESISTANT GRILLE ON THE MARKET

#### INSTANT HEAT NICHROME ELEMENT

#### MULTIPLE INSTALLATION OPTIONS RECESSED, SURFACE MOUNTED, HORIZONTAL OR VERTICAL

#### OPTIONAL DISCONNECT SWITCH AVAILABLE

#### ADAPTS TO MULTIPLE MARKETS AVAILABLE IN: 120 V, 208 V AND 240 V

#### COLORS

- **standard:** white, soft white
- **Orora (optional):** refer to [www.stelpro.com/en-US/Orora](http://www.stelpro.com/en-US/Orora)

#### FINISH

- epoxy-polyester powdercoat

#### MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- quiet fan – 40 CFM (500 W to 1000 W models) – 75 CFM (1250 W to 2000 W models)
- thermal protection with automatic reset
- dual wattage (DW) in some models (see DW in technical specifications table)

#### ELEMENT

- nichrome element produces instant heat

#### CONTROL

- built-in thermostat (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended

#### INSTALLATION

- wall mounted
- recessed (wall must have a depth of 2 3/8 in. minimum)
- surface mounted with surface adapter (optional)
- four installation positions


#### WARRANTY

- five years

#### IDEAL FOR:

hallway, bathroom, locker room, office

#### FOUR INSTALLATION OPTIONS

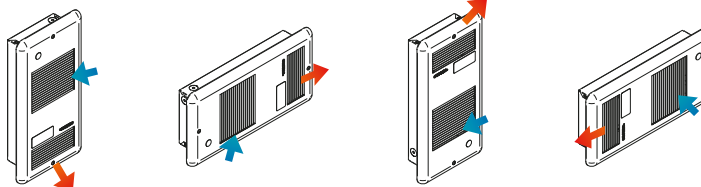

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-color products. For all the latest models and prices, please refer to our website at [www.stelpro.com](http://www.stelpro.com).



FC\_RWF\_US\_2710420

# TECHNICAL SPECIFICATIONS

WITHOUT CONTROL	BUILT-IN SINGLE POLE THERMOSTAT	BUILT-IN DOUBLE POLE THERMOSTAT	POWER*		VOLTAGE	FLOW	WEIGHT
CODE	CODE	CODE	WATTS	BTU/H	VOLTS	CFM	LB
ARWF1001	ARWF1001T	ARWF1001T2	1000/500	3413/1706	120	40	6
ARWF1008	ARWF1008T	ARWF1008T2	1000/500	3413/1706	208	40	6
ARWF1002	ARWF1002T	ARWF1002T2	1000/500	3413/1706	240	40	6
ARWF1501	ARWF1501T	ARWF1501T2	1500/750	5119/2560	120	75	6
ARWF1508	ARWF1508T	ARWF1508T2	1500/750	5119/2560	208	75	6
ARWF1502	ARWF1502T	ARWF1502T2	1500/750	5119/2560	240	75	6
ARWF2008	ARWF2008T	ARWF2008T2	2000/1000	6825/3413	208	75	6
ARWF2002	ARWF2002T	ARWF2002T2	2000/1000	6825/3413	240	75	6

Add W for white or SW for soft white (consult the optional colors chart or contact your Stelpro representative for all other colors).

--- not available

\* dual wattage

# ACCESSORIES

PRODUCT	DESCRIPTION
ARWFT1**	built-in single pole thermostat [120 V-347 V]
ARWFT2**	built-in double pole thermostat [120 V-347 V]
RWFSA*	surface adapter (white)
RWFDIS250*	disconnect switch [120 V-250 V] [17 A @ 120 V-12 A @ 250 V] [Unit without thermostat]
RWFDIS250T*	disconnect switch [120 V-250 V] [17 A @ 120 V-12 A @ 250 V][Unit with thermostat]
RWFDIS600*	disconnect switch [277 V-600 V] [Unit without thermostat]
RWFDIS600T*	disconnect switch [277 V-600 V] [Unit with thermostat]

\* Add W for white or SW for soft white

\* Supplied with a white knob (with a white grille), a soft white knob (with a soft white grille) and a black knob (with any other color grille)

\* Factory installed

# TECHNICAL DRAWINGS

